

CLASS RULE CHANGES

International Europe Class

The following amendments to the Class Rules have been approved to be effective 1st March 2002.

1. Procedure for elder masts, of which the model mast was derived from

Rule 3.5.4(ix) Delete present rule and insert:

"SCS/Marström mast spars up to production number 2292 need not be marked with an Authorized Manufacturing Code (AMC) and an Authorized Manufacturing Sticker (AMS).

Confirmation that such mast complies with the rules may either be by: -
endorsement by an official measurer of the existing old Measurement Form to the effect that the mast spar complies with the class rules with respect to items 3.5.3 through to 3.5.4 (vii) and 3.5.5

or

re-measurement and issue of a new Measurement Form signed by an official measurer. "

3.5.4 (I) add:

"except that the triangular sailtrack on older Marstrom masts is grandfathered for all events."

Rule 3.5.6 Delete present rule and insert:

"A boat may use any mast, which complies with any previous class rules, except:


- 1, At the Olympic Games after March 2000
- 2 After March 2000
 - i) at World Championships
 - ii) at Continental Championships
 - iii) at Regional Championships and events
 - iv) at any event where the Organizing Authority in its notice of race, states that masts shall comply with current class rules..

Rule 3.5.5. Mast Weight:

Add before the last sentence "They shall be positioned so that measurement at the stations shown in the measurement form may not be obstructed."

5. Sailtrack width


- 1.) Mast Design Specifications - Table of Offsets, figure I: min 3.5 mm
- 2.) Mast Measurement Diagram Sheet 1 of 2

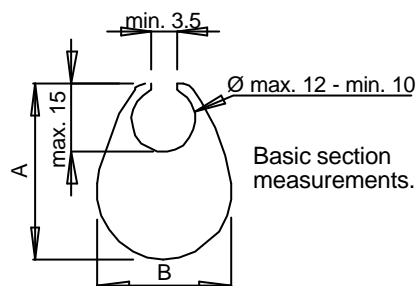

- 3.) Mast Measurement Form Item No. 4b10 (a) Sailtrack opening slot, width min 3.5 – max 4.5 mm

New:

- 1.) Delete Mast Design Specifications - Table of Offsets, figure “I: min 3.5 mm” and enter instead “I: ± 0.5 , 4.0 mm
- 2.)

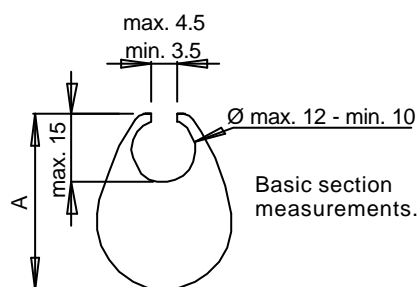

6. Rudder Fittings


3.4.5 (iv) The fittings to connect the rudder stock to the hull shall be made so that every rudder stock fits every hull. This shall apply for new rudder stocks and boats first measured after 1 March 1998 and all rudder stocks and all boats after 1 March 2000.

New:


Delete “and all rudder stocks and all boats after 1 March 2000”.

7. Rudder Fittings

Rudder Fittings Replacement Measurement Diagram

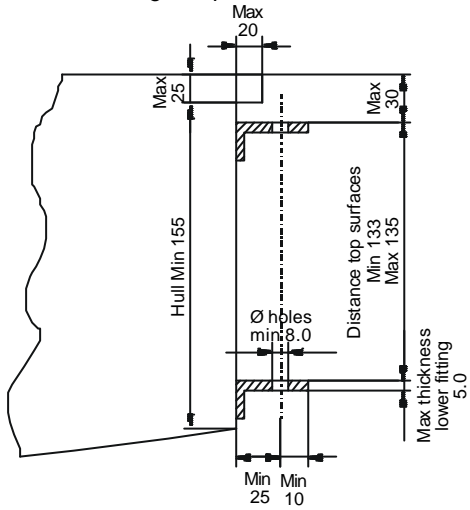

New:

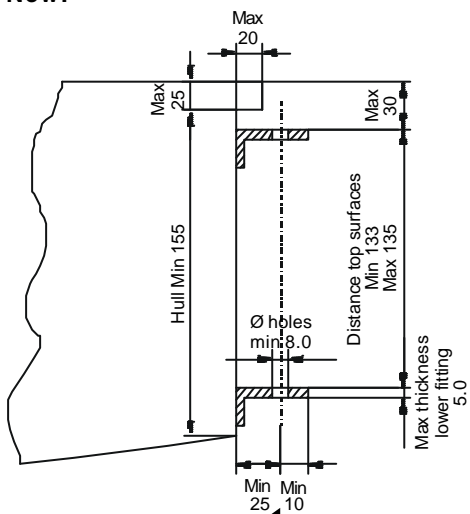

Delete "Min 10", insert "10 recommended."