

INTERNATIONAL SOLING CLASS

The following amendments to the Class Rules have been approved to be effective 1st March 2001.

Adjustment of shroud length

Rule C.9.6

Amendment: Delete the current rule and replace with the following:

“Adjustment of the length or tension of the shrouds shall be made only by threaded screw fittings. Fore and aft movements of the shroud fittings shall not be regarded as altering the shroud length or tension provided that the slope of the movement relative to the deck shall not exceed 20%. No other mechanism for adjustment of the length or tension of the shrouds is permitted.”

Keel bolts

Rule E.3.1.3

Amendment: Add the word “minimum” to the first sentence as follows: “The fin keel shall be fastened to the hull by minimum ten 12mm min. diameter non-corrosive stainless steel bolts.”

Lifting slings

Rule E.3.2.2

Amendment: After the last sentence of the current rule, add the following sentence: “No sling shall use a butt splice unless two swages are applied to this splice.”

Spinnaker Pole

Rule F.2.4.7 and F.4.4

Amendment: Delete the current rule and replace with the following words:

“F.2.4.7 Spinnaker pole fitting

The point of attachment of the spinnaker pole (height) shall be on the forward face of the mast and not more than 1150mm above the upper edge of the band defined by Rule F.2.4.5 (a).

Projection

maximum
52 mm

and

F.4.4 Dimensions

Spinnaker pole length

2615 mm”

Sails

Rule G.1.5

Amendment: Add after the words “sail labels” the words “or sail buttons”.

Mainsail - modifying the battens

Rule G.3.2.5

Amendment: Delete the current rule and replace with the following:

“Only four battens shall be permitted in the leech.

Batten pocket length:

Uppermost pocket:

not limited

Distance from headpoint to lower edge of batten pocket
at the luff (min.)

min. 1900 mm

Other pockets: Inside


max. 1200 mm

Batten pocket width: Inside

max. 60mm”

G.4

Headsail Jib

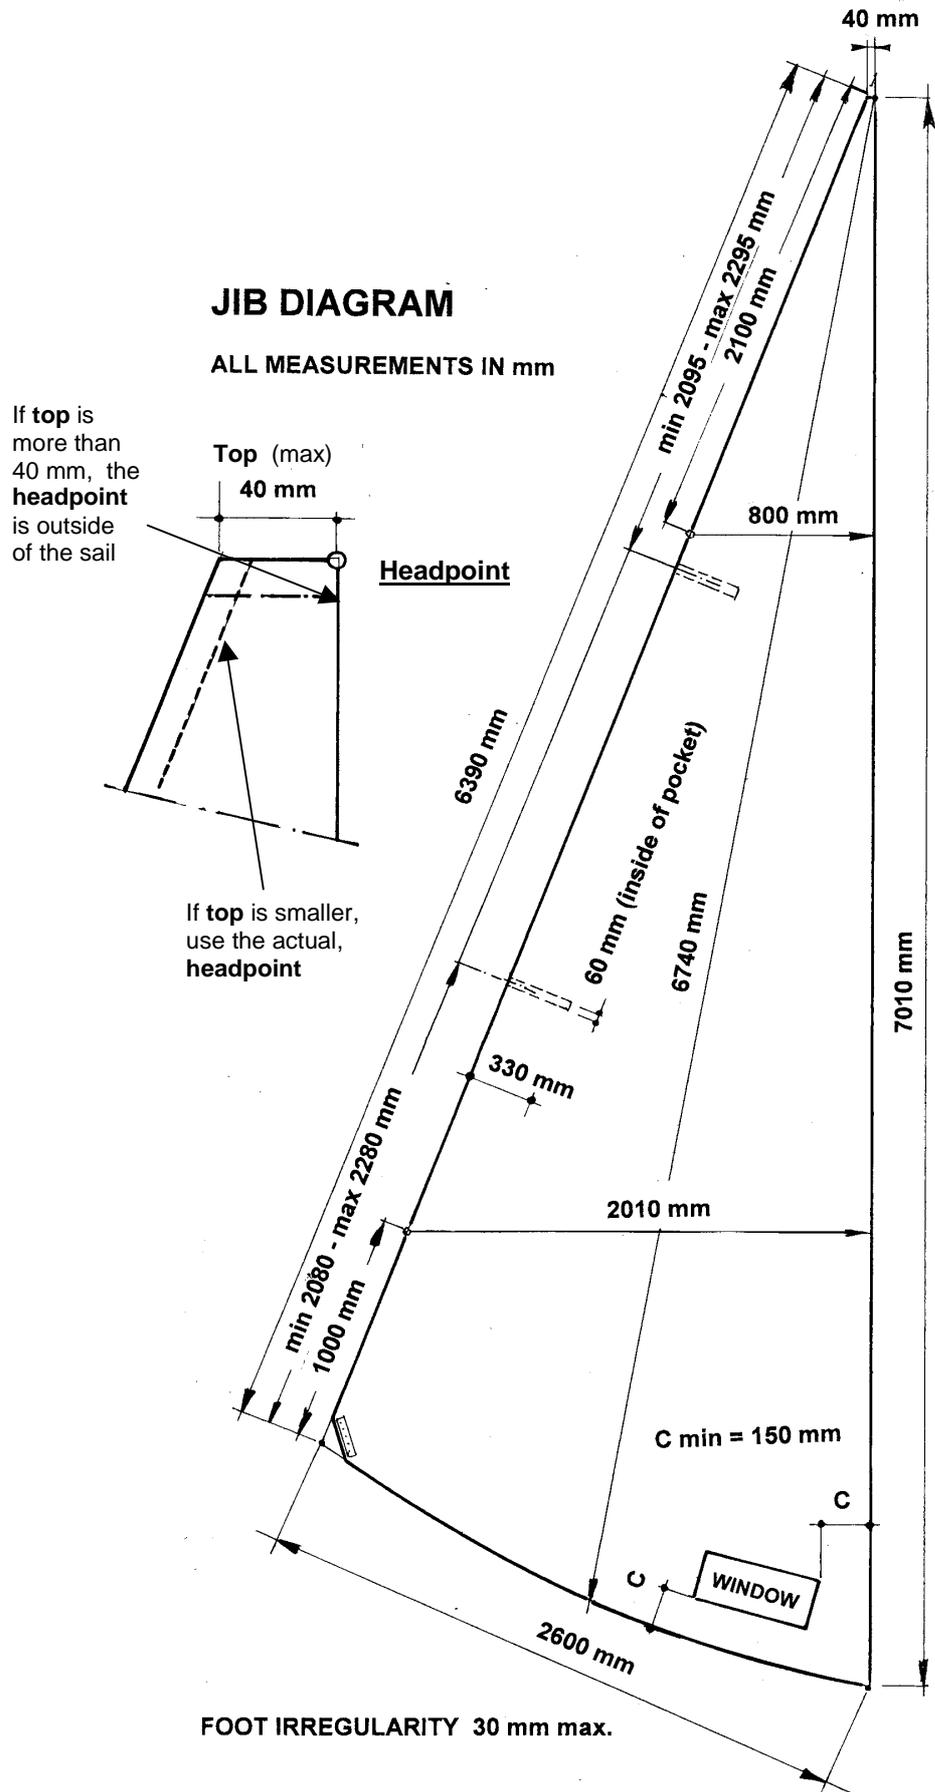

Construction

Rule G.4.1(b)

Amendment: Delete the current rule and replace with the following: “The following are permitted: Stitching, glues, tapes, corner eyes, hanks, batten pocket elastic, batten pocket patches, batten pocket end caps, leech line with fastener, three windows, sailmaker label, royalty label, sail button, tell tales, sail shape indicator stripes, certification mark.”

Dimensions

Rule G.4.2

Amendment: Delete the current rule and replace with the following:

a) Luff length	“maximum	7010 mm
b) Leech length	6390 mm	
c) Foot length	2600 mm	
d) Foot median	6740 mm	
e) Top width (see diagram)	40 mm	
f) Foot irregularity	30 mm	
	maximum	
g) The leech shall not be convex		
h) Upper girth at 2100 mm from Head Point	800 mm	
i) Lower girth at 1000 mm from Clew Point	2010 mm”	

Rule G.4.6

Amendment: Delete the current rule and replace with the following:

	“minimum	maximum
a) Head point to intersection of leech and centreline of uppermost batten pocket	2095 mm	2295 mm
b) Clew point to intersection of leech and centreline of lower batten pocket	2080 mm	2280 mm”

Large spinnaker

G.5.2.1

Amendment: Delete current rule and replace with the following:

	“minimum	maximum
a) Leech lengths	7300 mm	7500 mm
b) Foot length	5180 mm	5580 mm
c) Foot Median		8750 mm
d) Difference between diagonals		50 mm
e) Half width - definition see ERS	5500 mm	5880 mm”

Small spinnaker

Rule G.5.2.2

Amendment: Delete current rule and replace with the following:

	“minimum	maximum
a) Leech lengths	7300 mm	7500 mm
b) Foot length	4760 mm	5160 mm
c) Foot Median		8400 mm
d) Difference between diagonals		50 mm
e) Half width - definition see ERS	3800 mm	5000 mm”